
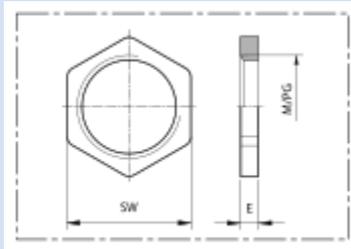


GM 164

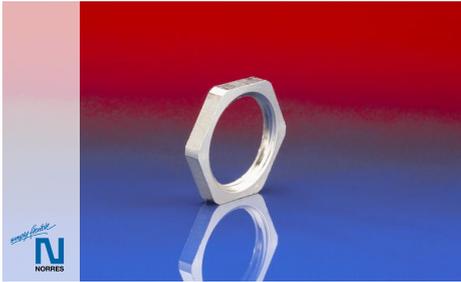

Metal counter nut

Applications

- Cable protection: accessory for cable protection screw connection for assembling of fitting protection hose, electric installation, switch cabinets, switch cabinet installation, cable harnessing/ cable assembly

Properties

- thread reference: M (metric) to EN 60423, P (PG) to DIN 40430
- conforms to RoHS guideline

Design

- accessories
- Nickel plated brass

Delivery variants

- further diameters available on request

Outer thread metric	Thread	Thickness	Wrench Size across Flats SW	Weight	PU	Order No.
M EN 60423	PG DIN 40430	(in)	(in)	(lb/100pcs)	(Pcs)	
M 12 x 1,5	-	0.118	0.591	0.441	50	164-8012-9050
M 16 x 1,5	-	0.118	0.787	0.882	50	164-8016-9050
M 20 x 1,5	-	0.138	0.945	1.323	50	164-8020-9050
M 25 x 1,5	-	0.138	1.181	2.205	25	164-8025-9025
M 32 x 1,5	-	0.177	1.378	2.536	20	164-8032-9020
M 40 x 1,5	-	0.177	1.772	4.190	10	164-8040-9010
M 50 x 1,5	-	0.217	2.165	6.836	10	164-8050-9010
M 63 x 1,5	-	0.236	2.756	12.789	5	164-8063-9005
-	PG 7	0.114	0.591	0.441	50	164-9007-9050
-	PG 9	0.114	0.709	0.662	50	164-9009-9050
-	PG 11	0.122	0.827	0.662	50	164-9011-9050
-	PG 13,5	0.122	0.906	0.882	50	164-9013-9050
-	PG 16	0.122	1.024	1.103	50	164-9016-9050
-	PG 21	0.142	1.260	1.764	20	164-9021-9020
-	PG 29	0.161	1.614	2.867	20	164-9029-9020
-	PG 36	0.201	2.008	4.410	10	164-9036-9010
-	PG 42	0.201	2.362	5.072	5	164-9042-9005
-	PG 48	0.220	2.520	7.056	5	164-9048-9005

Accessories



AU 159

Positive and negative pressure ratings are the recommended maximum operating values. Products can be manufactured to meet higher operating values upon request. The bend radius is calculated from the center of the hose in an arched position. Additional information at www.norres.com/us/technology/. NORRES reserves the right to modify technical data at any time. Technical data based on tests at 68 °F and are approx. values. Proper use and maintenance of NORRES hoses is the sole responsibility of purchaser and ultimate user of the product. The individual conditions, applications and the number of variables make firm recommendations technically impossible. This information is intended as a general guide only.