


# CONNECT 228

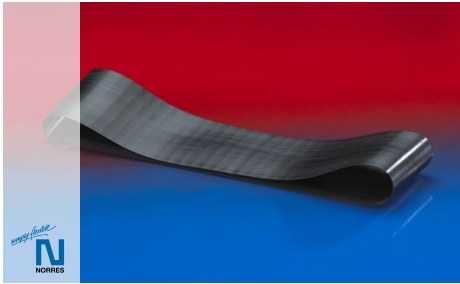

## Elastic clamp protection tape

### Properties

- easily and quickly fitted
- re-usable
- highly abrasion resistant
- good resistance to oil, gasoline, and chemicals

- conforms to RoHS guideline
- REACH according to --> Technology / Technical Information / REACH

### Temperature range

- -40°F to 195°F
- short time to 255°F

### Design

- wall: polyurethane

### Delivery variants

- further diameters available on request
- black (standard)
- special colors: full colored

Suitable for hose I.D. (in)	Order No.
1,5 / 38	228-0038-0000
2 / 50-51	228-0050-0000
2,36 / 60	228-0060-0000
2,5 / 63-65	228-0063-0000
3 / 75-76	228-0075-0000
3,5 / 89-90	228-0090-0000
4 / 100-102	228-0100-0000
4,5 / 114-115	228-0115-0000
5 / 125-127	228-0125-0000
6 / 150-152	228-0150-0000
6,3 / 160	228-0160-0000
6,5 / 165	228-0165-0000
7 / 178-180	228-0180-0000
8 / 200-203	228-0200-0000

## Accessories



CLAMP 212



CONNECT 270-271

Positive and negative pressure ratings are the recommended maximum operating values. Products can be manufactured to meet higher operating values upon request. The bend radius is calculated from the center of the hose in an arched position. Additional information at [www.norres.com/us/technology/](http://www.norres.com/us/technology/). NORRES reserves the right to modify technical data at any time. Technical data based on tests at 68°F and are approx. values. Proper use and maintenance of NORRES hoses is the sole responsibility of purchaser and ultimate user of the product. The individual conditions, applications and the number of variables make firm recommendations technically impossible. This information is intended as a general guide only.