
CONNECT THREAD FITTING 234



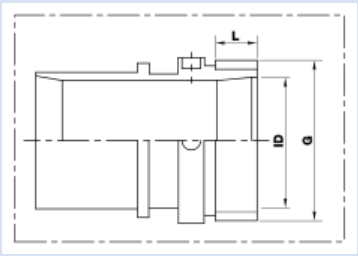

Threaded adapter

Applications
- food industry, pharmaceutical industry: foodstuff, pharmaceutical
- vacuum conveying equipment, vacuum hopper, suction conveyor, dosing system
- pelleting machines/ tablet presses

Properties
- thread reference DIN ISO 228
- conforms to RoHS guideline
- REACH according to --> Technology / Technical Information / REACH

Temperature Range
- -40 °C to 90 °C

Delivery variants
- further diameters available on request
- gas and liquid tight as pre-fitted version

Size (mm)	Thread	Weight (kg/pcs)	Suitable for Hose I.D. (mm)	Order No.
Thread adapter DIN ISO 228; aluminium; (please select the hose and the assembly separately)				
25	G1	0,120	Ø 25	234-0025-2917
32	G1 1/4	0,160	Ø 32	234-0032-2917
38	G1 1/2	0,180	Ø 38	234-0038-2917
40	G1 1/2	0,210	Ø 40	234-0040-2917
75	G3	0,400	Ø 76	234-0075-2917
80	G3	0,480	Ø 80	234-0080-2917
100	G4	0,700	Ø 101	234-0100-2917
Thread adapter DIN ISO 228; electro-galvanised steel; (please select the hose and the assembly separately)				
25	G1	0,360	Ø 25	234-0025-2918
32	G1 1/4	0,450	Ø 32	234-0032-2918
40	G1 1/2	0,610	Ø 40	234-0040-2918
65	G2 1/2	0,896	Ø 65	234-0065-2918
80	G3	1,400	Ø 80	234-0080-2918
100	G4	2,030	Ø 101	234-0100-2918
Thread adapter DIN ISO 228; stainless steel 1.4301 (stamped) = AISI 304; (please select the hose and the assembly separately)				
25	G1	0,360	Ø 25	234-0025-2919
38	G1 1/2	0,520	Ø 38	234-0038-2919
40	G1 1/2	0,610	Ø 40	234-0040-2919
50	G2	0,850	Ø 51	234-0050-2919
65	G2 1/2	0,896	Ø 65	234-0065-2919
75	G3	1,000	Ø 76	234-0075-2919
80	G3	1,400	Ø 80	234-0080-2919
100	G4	2,030	Ø 101	234-0100-2919
Thread adapter DIN ISO 228; Stainless steel 1.4404 (stamped) = AISI 316L; (please select the hose and the assembly separately)				
25	G1	0,360	Ø 25	234-0025-2920
32	G1 1/4	0,450	Ø 32	234-0032-2920
40	G1 1/2	0,610	Ø 40	234-0040-2920
50	G2	0,850	Ø 51	234-0050-2920

Overpressure and underpressure are recommended threshold operating values, products can be subjected to higher loads upon request. The bending radius is measured through the inside of the hose arch. The right to make technical modifications is reserved. All values determined at 20 °C and are approx. data. Additional information at www.norres.com/en/technology/.

CONNECT THREAD FITTING 234

Size (mm)	Thread	Weight (kg/pcs)	Suitable for Hose I.D. (mm)	Order No.
65	G2 1/2	0,896	Ø 65	234-0065-2920
75	G3	1,000	Ø 76	234-0075-2920
80	G3	1,400	Ø 80	234-0080-2920
100	G4	2,030	Ø 101	234-0100-2920

Accessories



CONNECT PRESS ASSEMBLY 232



CONNECT SAFETY CLAMP ASSEMBLY 231



CONNECT MOULD ASSEMBLY 233

Overpressure and underpressure are recommended threshold operating values, products can be subjected to higher loads upon request. The bending radius is measured through the inside of the hose arch. The right to make technical modifications is reserved. All values determined at 20 °C and are approx. data. Additional information at www.norres.com/en/technology/.