



CONNECT 246 FOOD

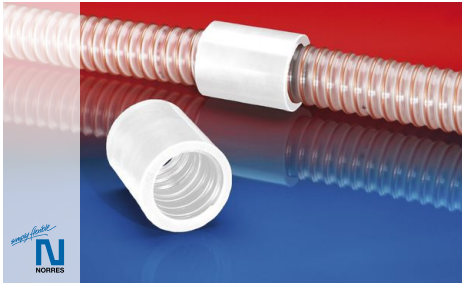

Spiral hose connector for connecting, lengthening or repairing spiral hoses, foodgrade

Applications

- food industry, pharmaceutical industry: foodstuff, pharmaceutical
- vacuum conveying equipment, vacuum hopper, suction conveyor, dosing system
- pelleting machines/ tablet presses
- industrial vacuum cleaners, vacuum cleaners

Properties

- easily and quickly fitted

- re-usable (threaded version)
- highly abrasion resistant
- Food grade wall, complies with: EU-Directive 10/2011, EC 1935/2004 and EU 2015/174
- odourless and tasteless
- microbe and hydrolysis resistant
- good resistance to oil, gasoline and chemicals
- conforms to RoHS guideline

- REACH according to --> Technology / Technical Information / REACH

Temperature Range

- -40°C to 90°C
- short time to 125°C

Delivery variants

- special colours: full coloured
- further diameters available on request

| Size (mm) | Threading depth Hose (mm) | Total Length (mm) | Weight (kg/pcs) | Suitable for Hose I.D. (mm) | Order No. |
|---|---------------------------------|-------------------------|--------------------|-----------------------------------|---------------|
| Threaded; Suitable for Hose 350, 351, 355, 533, 341, 345 | | | | | |
| 25 | 32 | 71 | 0,120 | 25 | 246-0025-8600 |
| 32 | 32 | 71 | 0,150 | 32 | 246-0032-8600 |
| 38 | 37 | 83 | 0,170 | 38 | 246-0038-8600 |
| 40 | 37 | 83 | 0,16 | 40 | 246-0040-8600 |
| 50 | 42 | 95 | 0,25 | 50 | 246-0050-8600 |
| 60 | 47 | 105 | 0,3 | 60 | 246-0060-8600 |
| 70 | 47 | 105 | 0,33 | 70 | 246-0070-8600 |
| 80 | 52 | 117 | 0,4 | 80 | 246-0080-8600 |
| 100 | 57 | 127 | 0,65 | 100 | 246-0100-8600 |
| Threaded; Suitable for Hose 356 | | | | | |
| 50 | 42 | 95 | 0,25 | 50 | 246-0050-8601 |
| 60 | 47 | 105 | 0,3 | 60 | 246-0060-8601 |
| 100 | 57 | 127 | 0,65 | 100 | 246-0100-8601 |

Overpressure and underpressure are recommended threshold operating values, products can be subjected to higher loads upon request. The bending radius is measured through the inside of the hose arch. The right to make technical modifications is reserved. All values determined at 20°C and are approx. data. Additional information at www.norres.com/en/technology/.