


# 3128 TEMPERFORM/BLUE

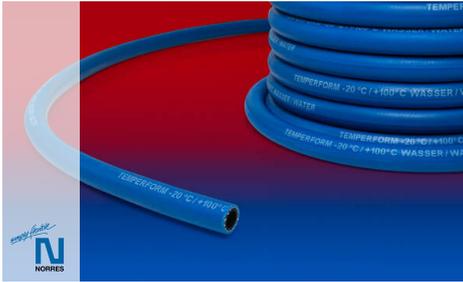

## Cooling hose for injection molding machines

### Applications

- often used in injection molding machines in the thermoplastics industry
- frequently used as cooling water hose for hot and cold water

### Properties

- according to the norm EN ISO 1307:2008

- UV and ozone resistant
- kink proof, dimensionally stable and extremely flexible
- burst pressure 60 bar

### Temperature Range

- -20 °C to 100 °C

### Design

- inner tube made of EPDM
- outer layer made of EPDM
- outer layer smooth and extruded
- textile plies

### Delivery variants

- black inner tube, blue exterior wall

I.D.	outer Ø	Operating pressure (20 °C)	Bending Radius	Weight	Dimensions in Stock	Order No.
(in / mm)	(mm)	(bar)	(mm)	(kg/m)	(m)	
1/2 / 12,7	22.00	20,000	100.00	0.37	40	3128-013-001

Overpressure and underpressure are recommended threshold operating values, products can be subjected to higher loads upon request. The bending radius is measured through the inside of the hose arch. The right to make technical modifications is reserved. All values determined at 20 °C and are approx. data. Additional information at [www.norres.com/en/technology/](http://www.norres.com/en/technology/).