
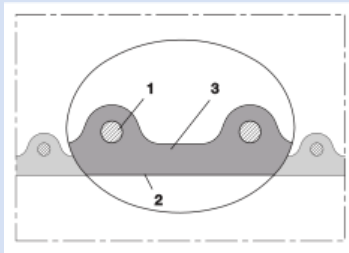


AIRDUC® PUR 355 SWEEPER REINFORCED

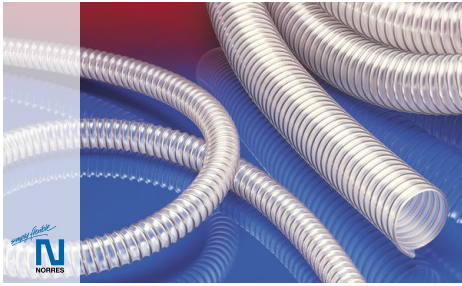

Sweeper hose, heavy and reinforced, interior folds

Applications

- municipal vehicle: sweeper, sweeping machine

Properties

- heavy duty and reinforced
- highly abrasion resistant
- microbe resistant
- REACH according to --> Technology / Technical Information / REACH

- very good low temperature flexibility
- conforms to RoHS guideline

Temperature Range

- -40° C to 90° C

Design

- AIRDUC® profile hose
- spring steel wire firmly embedded in wall

- wall: special premium polyurethane (Pre-PUR®)
- wall thickness 1,5 to 1,8 mm approx.
- reinforcement of the primary abrasion areas

Delivery variants

- further diameters and lengths available on request
- transparent (standard)
- special colours: transparent, partially coloured, completely coloured
- customer-specific branding

I.D.	outer Ø	Pressure	Vacuum	Bending Radius	Weight	Dimensions in Stock	Production Lengths	Order No.
(in / mm)	(mm)	(bar)	(bar)	(mm)	(kg/m)	(m)	(m)	
8 / 200-203	215.00	0,365	0,125	178.00	2.65	-	5	355-0203-5015

Accessories



CONNECT 240 + 241 AS



CONNECT 270-271



CLAMP 211

Overpressure and underpressure are recommended threshold operating values, products can be subjected to higher loads upon request. The bending radius is measured through the inside of the hose arch. The right to make technical modifications is reserved. All values determined at 20° C and are approx. data. Additional information at www.norres.com/en/technology/.