
# ISODUC PVC 368 GREY



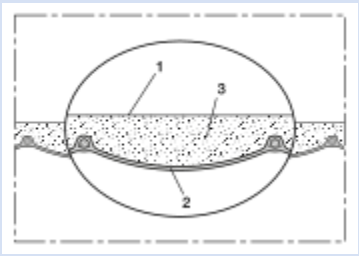


## PVC air conditioning hose, insulated, flame resistant, grey

**Applications**
- flexible hose/ ducting for gases
- Air conditioning
- Thermal and acoustic insulation

**Properties**
- fabric reinforced
- highly flexible + compressible 6:1
- insulating
- flame-retardant according to: EN13501-1:2018, B-s1, d0
- conforms to RoHS guideline


**Temperature Range**
- -10 °C to 110 °C

**Design**
- PROTAPE® tape hose
- spring steel wire integrated in wall
- wall: PVC coated fabric
- special thermal insulation layer
- Polyester insulation thickness 25 mm and weight 300 g/m²
- Pressure max. 200 mm H2O
- Air speed max. 20 m/s
- Bending radius 0,6 x ID

**Delivery variants**
- further diameters and lengths available on request
- grey (standard)

| I.D. (in / mm) | outer Ø (mm) | Bending Radius (mm) | Weight (kg/m) | Production Lengths (m) | Order No. |
|---|---|---|---|---|---|
| 3 / 75-76 | 126.60 | 46.00 | 0.25 | 10 | 368-0076-3500 |
| - / 82 | 132.60 | 49.00 | 0.28 | 10 | 368-0082-3500 |
| 4 / 100-102 | 152.60 | 61.00 | 0.31 | 10 | 368-0102-3500 |
| 5 / 125-127 | 177.60 | 76.00 | 0.37 | 10 | 368-0127-3500 |
| 6 / 150-152 | 202.60 | 91.00 | 0.45 | 10 | 368-0152-3500 |
| 6,3 / 160 | 210.60 | 96.00 | 0.47 | 10 | 368-0160-3500 |
| 7 / 178-180 | 230.60 | 108.00 | 0.52 | 10 | 368-0180-3500 |
| 8 / 200-203 | 253.60 | 122.00 | 0.62 | 10 | 368-0203-3500 |
| 10 / 254 | 304.60 | 152.00 | 0.82 | 10 | 368-0254-3500 |
| 12 / 305 | 355.60 | 183.00 | 0.92 | 10 | 368-0305-3500 |
| - / 315 | 365.60 | 189.00 | 0.88 | 10 | 368-0315-3500 |
| 14 / 356 | 406.60 | 214.00 | 1.00 | 10 | 368-0356-3500 |
| 16 / 405-406 | 456.60 | 244.00 | 1.12 | 10 | 368-0406-3500 |
| 18 / 457 | 507.60 | 274.00 | 1.33 | 10 | 368-0457-3500 |
| 20 / 508 | 558.60 | 305.00 | 1.48 | 10 | 368-0508-3500 |
| 24 / 610 | 660.60 | 366.00 | 1.77 | 10 | 368-0610-3500 |

## Accessories


CONNECT 228


CONNECT 270-271


CLAMP 208


CLAMP 210 BRIDGE CLAMP

Overpressure and underpressure are recommended threshold operating values, products can be subjected to higher loads upon request. The bending radius is measured through the inside of the hose arch. The right to make technical modifications is reserved. All values determined at 20 °C and are approx. data. Additional information at www.norres.com/en/technology/.