
SuperFlex PVC 372



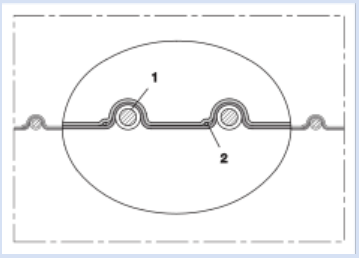

Highly flexible PVC hose, light weight

Applications
- flexible hose/ ducting for gases and for dust, powder, fibers
- industrial vacuum cleaners, vacuum cleaners
- construction drying
- medical equipment/ medical technology, healthcare sector: cable protection conduit, air supply hose, extraction hose
- scrubber, floor cleaning machine

Properties
- lightweight
- highly flexible
- good resistance to alkalis and acids
- good resistance to chemicals
- conforms to RoHS guideline
- REACH according to --> Technology / Technical Information / REACH

Temperature range
- 32 °F to 185 °F


Design
- SuperFlex design
- plastic coated spring steel wire
- wall: high grade soft PVC

Delivery variants
- further diameters and lengths available on request
- black (standard)

I.D. (in / mm)	outer Ø (in)	Pressure (psi)	Vacuum (inHG)	Bending radius (in)	Weight (lb/ft)	Dimensions in Stock (ft)	Order No.
standard version, reinforced, left-hand pitch							
1 / 25	1.220	24.657	5.906	0.512	0.134	**50**	372-0025-0000
- / 28	1.339	23.206	5.906	0.551	0.155	**50**	372-0028-0000
1,25 / 32	1.496	21.756	5.906	0.630	0.188	**50**	372-0032-0000
1,36 / 35	1.614	20.306	5.906	0.709	0.208	**50**	372-0035-0000
1,5 / 38	1.732	20.306	5.906	0.748	0.228	**50**	372-0038-0000
- / 41	1.850	20.306	5.315	0.827	0.249	**50**	372-0041-0000
1,75 / 44-45	2.008	18.855	4.725	0.866	0.255	**50**	372-0044-0000
2 / 50-51	2.244	18.855	4.430	1.024	0.309	**50**	372-0051-0000
2,5 / 63-65	2.717	14.504	4.134	1.220	0.356	**50**	372-0063-0000
- / 70	2.992	13.054	3.544	1.378	0.390	**-**	372-0070-0000
3 / 75-76	3.228	11.603	2.953	1.496	0.457	**50**	372-0076-0000
- / 80	3.386	10.153	2.658	1.575	0.558	**-**	372-0080-0000
3,5 / 89-90	3.740	10.153	2.658	1.772	0.625	**50**	372-0089-0000
4 / 100-102	4.173	8.702	2.362	2.047	0.672	**50**	372-0100-0000

Accessories


CONNECT 226


CONNECT 228


CLAMP 208


CONNECT 223


CONNECT 270-271

Positive and negative pressure ratings are the recommended maximum operating values. Products can be manufactured to meet higher operating values upon request. The bend radius is calculated from the center of the hose in an arched position. Additional information at www.norres.com/us/technology/. NORRES reserves the right to modify technical data at any time. Technical data based on tests at 68 °F and are approx. values. Proper use and maintenance of NORRES hoses is the sole responsibility of purchaser and ultimate user of the product. The individual conditions, applications and the number of variables make firm recommendations technically impossible. This information is intended as a general guide only.

2026/09