


METAL HOSE ALU 377 - ALUFLEX

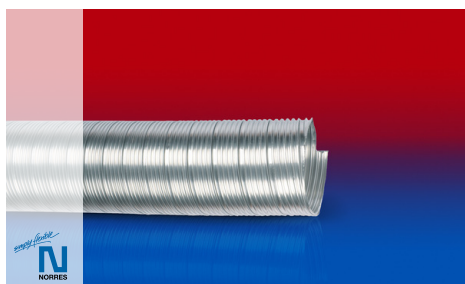

Aluminium air conditioning hose, flame retardant (M0), self-locking

Applications

- flexible hose/ ducting for gases
- Air conditioning in marine applications
- Kitchen hood, fume hood, exhaust air duct

Properties

- highly flexible + compressible 3:1
- retaining any adjusted position
- conforms to RoHS guideline

Temperature Range

- 300°C

Design

- Metal hose
- Pressure max. 300 mm H2O

Delivery variants

- silver
- further diameters and lengths available on request

| I.D. | outer Ø | Bending Radius | Weight | Production Lengths | Order No. |
|-------------|---------|----------------|--------|--------------------|---------------|
| (in / mm) | (mm) | (mm) | (kg/m) | (m) | |
| 3 / 75-76 | 85.00 | 38.00 | 0.00 | 3 | 377-0075-1000 |
| - / 80 | 90.00 | 40.00 | 0.00 | 3 | 377-0080-1000 |
| 3,5 / 89-90 | 100.00 | 45.00 | 0.00 | 3 | 377-0090-1000 |
| 4 / 100-102 | 110.00 | 50.00 | 0.00 | 3 | 377-0100-1000 |
| - / 110 | 120.00 | 55.00 | 0.00 | 3 | 377-0110-1000 |
| 4,72 / 120 | 130.00 | 60.00 | 0.00 | 3 | 377-0120-1000 |
| 5 / 125-127 | 135.00 | 63.00 | 0.00 | 3 | 377-0125-1000 |
| 5,5 / 140 | 150.00 | 70.00 | 0.00 | 3 | 377-0140-1000 |
| 6 / 150-152 | 160.00 | 75.00 | 0.00 | 3 | 377-0150-1000 |
| 6,3 / 160 | 170.00 | 80.00 | 0.00 | 3 | 377-0160-1000 |
| 7 / 178-180 | 190.00 | 90.00 | 0.00 | 3 | 377-0180-1000 |
| 8 / 200-203 | 210.00 | 100.00 | 0.00 | 3 | 377-0200-1000 |
| - / 250 | 260.00 | 125.00 | 0.00 | 3 | 377-0250-1000 |
| 11 / 280 | 290.00 | 140.00 | 0.00 | 3 | 377-0280-1000 |
| - / 300 | 310.00 | 150.00 | 0.00 | 3 | 377-0300-1000 |
| - / 315 | 325.00 | 158.00 | 0.00 | 3 | 377-0315-1000 |
| - / 350 | 360.00 | 175.00 | 0.00 | 3 | 377-0350-1000 |
| - / 400 | 410.00 | 200.00 | 0.00 | 3 | 377-0400-1000 |

Accessories



CLAMP 208



CONNECT 270-271

Overpressure and underpressure are recommended threshold operating values, products can be subjected to higher loads upon request. The bending radius is measured through the inside of the hose arch. The right to make technical modifications is reserved. All values determined at 20°C and are approx. data. Additional information at www.norres.com/en/technology/.