


METAL HOSE ALU 377 - ALUFLEX

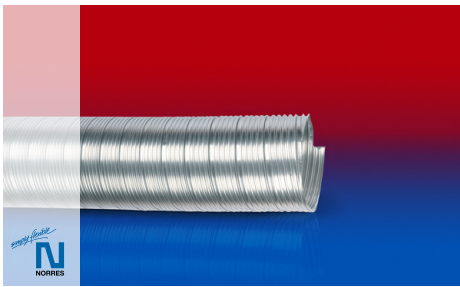

Aluminium air conditioning hose, flame retardant (M0), self-locking

Applications

- flexible hose/ ducting for gases
- Air conditioning in marine applications
- Kitchen hood, fume hood, exhaust air duct

Properties

- highly flexible + compressible 3:1
- retaining any adjusted position
- conforms to RoHS guideline

Temperature range

- 572°F

Design

- Metal hose
- Pressure max. 300 mm H2O

Delivery variants

- silver
- further diameters and lengths available on request

I.D.	outer Ø	Bending radius	Weight	Production lengths	Order No.
(in / mm)	(in)	(in)	(lb/ft)	(ft)	
3 / 75-76	3.346	1.496	0.000	10	377-0075-1000
- / 80	3.543	1.575	0.000	10	377-0080-1000
3,5 / 89-90	3.937	1.772	0.000	10	377-0090-1000
4 / 100-102	4.331	1.969	0.000	10	377-0100-1000
- / 110	4.724	2.165	0.000	10	377-0110-1000
4,72 / 120	5.118	2.362	0.000	10	377-0120-1000
5 / 125-127	5.315	2.480	0.000	10	377-0125-1000
- / 130	5.512	2.559	0.000	10	377-0130-1000
5,5 / 140	5.906	2.756	0.000	10	377-0140-1000
6 / 150-152	6.299	2.953	0.000	10	377-0150-1000
6,3 / 160	6.693	3.150	0.000	10	377-0160-1000
7 / 178-180	7.480	3.543	0.000	10	377-0180-1000
8 / 200-203	8.268	3.937	0.000	10	377-0200-1000
- / 250	10.236	4.921	0.000	10	377-0250-1000
11 / 280	11.417	5.512	0.000	10	377-0280-1000
- / 300	12.205	5.906	0.000	10	377-0300-1000
- / 315	12.795	6.220	0.000	10	377-0315-1000
- / 350	14.173	6.890	0.000	10	377-0350-1000
- / 400	16.142	7.874	0.000	10	377-0400-1000

Accessories



CONNECT 270-271



CLAMP 208

Positive and negative pressure ratings are the recommended maximum operating values. Products can be manufactured to meet higher operating values upon request. The bend radius is calculated from the center of the hose in an arched position. Additional information at www.norres.com/us/technology/. NORRES reserves the right to modify technical data at any time. Technical data based on tests at 68 °F and are approx. values. Proper use and maintenance of NORRES hoses is the sole responsibility of purchaser and ultimate user of the product. The individual conditions, applications and the number of variables make firm recommendations technically impossible. This information is intended as a general guide only.