
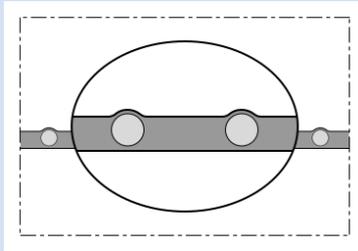


NORPLAST® PVC 380 GREEN

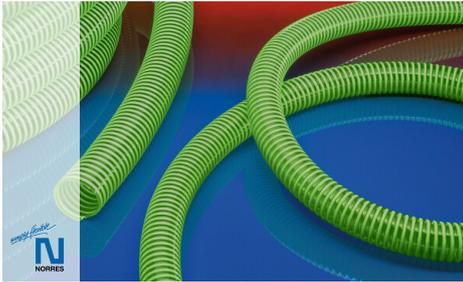

PVC hose, heavy

Applications

- flexible hose/ ducting for liquids and for powder, bulk material, granulate and for gases
- airport, airplane, rail vehicle, train, railway, boat, ship/ vessel, yacht: toilet discharging/ disposal
- agricultural industry: irrigation, fertilizers, insecticides
- caravan/ trailer, mobile home/ camper/ RV, boat, ship/ vessel, yachts: sanitary installation, water supply

Properties

- heavy duty
- good resistance to alkalis and acids

- good resistance to chemicals
- conforms to RoHS guideline
- REACH according to --> Technology / Technical Information / REACH
- In compliance with Regulation (EU) No. 10/2011 for simulants A, B, C

Temperature Range

- -10°C to 60°C

Design

- Full plastic hose

- hard plastic spiral integrated in wall
- spiral: rigid PVC
- smooth interior
- wall: soft PVC

Delivery variants

- further diameters and lengths available on request
- green-transparent (standard)
- special colours: coloured spiral, full coloured
- customer-specific branding

I.D.	outer Ø	Vacuum	Operating pressure (20°C)	Bending Radius	Weight	Dimensions in Stock	Production Lengths	Order No.
(in / mm)	(mm)	(bar)	(bar)	(mm)	(kg/m)	(m)	(m)	
1 / 25	30.60	0,589	6,000	130.00	0.25	50	25	380-0025-8000
3 / 75-76	85.00	0,491	4,000	530.00	1.15	50	-	380-0076-8000

Accessories



CLAMP 208



CLAMP 211

Overpressure and underpressure are recommended threshold operating values, products can be subjected to higher loads upon request. The bending radius is measured through the inside of the hose arch. The right to make technical modifications is reserved. All values determined at 20°C and are approx. data. Additional information at www.norres.com/en/technology/.