



NORFLEX® PTFE 407

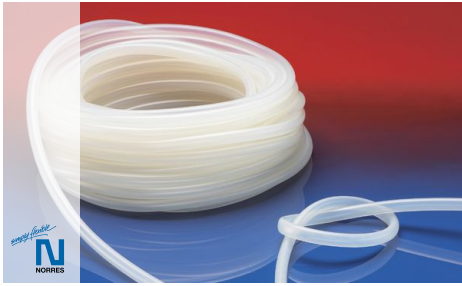

PTFE hose/ tubing

Applications

- flexible hose/ ducting for liquids and for gases
- food industry, pharmaceutical industry: food, pharmaceutical
- heating hose: interior hose for media transfer

Properties

- highly flexible
- food grade wall, complies with: FDA 21 CFR Part 177.1550, German guideline XV BfR

- odorless and tasteless
- anti-adhesive
- microbe and hydrolysis resistant
- good resistance to alkalis and acids
- extremely good resistance to chemicals
- conforms to RoHS guideline
- REACH according to --> Technology / Technical Information / REACH

Temperature range

- 240°F to 390°F

Design

- NORFLEX® design
- wall interior and exterior smooth
- wall: PTFE

Delivery variants

- further diameters and lengths available on request
- transparent (standard)

I.D.	outer Ø	Wall thickness	Pressure	Weight	Dimensions in Stock	Order No.
(in / mm)	(in)	(in)	(psi)	(lb/ft)	(ft)	
- / 2	0.157	0.039	217.560	0.007	150	407-9020-0000
1/8 / 3	0.197	0.039	217.560	0.007	150	407-9030-0000
- / 4	0.236	0.039	145.040	0.013	150	407-9040-0000
1/4 / 6	0.315	0.039	145.040	0.013	150	407-9060-0000
5/16 / 8	0.394	0.039	72.520	0.020	150	407-9080-0000
3/8 / 10	0.472	0.039	72.520	0.027	150	407-9100-0000
- / 12	0.551	0.039	72.520	0.027	150	407-9120-0000
- / 14	0.630	0.039	72.520	0.034	150	407-9140-0000

Accessories



CLAMP 208