
NORPLAST® PVC 379 COSMO® ELASTICO



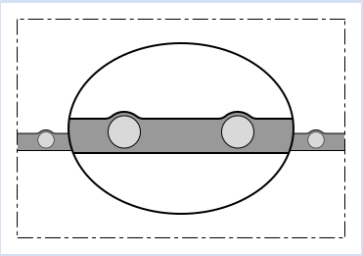

Thermoplastic suction hose

Applications
- for water, fertilizer and seeds
- flexible, translucent hose for suction of water under light working conditions for both industrial and agricultural applications
- Use on light vacuum pumps as pond hose
- Use on construction sites for water treatment
- Very good suitability for the passage of slurry on slurry injectors, trailing shoe systems and as a seed feed hose

Properties
- Extremely flexible construction
- according to the norm EN ISO 1307:2008

Temperature range
- 5°F to 140°F

Design
- PVC inner layer
- PVC outer layer
- slightly corrugated construction cover
- rigid PVC spiral
- smooth interior

Delivery variants
- green-transparent inner tube, green-transparent exterior wall, white spiral (standard)

I.D. (in / mm)	outer Ø (in)	Vacuum (inHG)	Operating pressure (68°F) (bar)	Bending radius (in)	Weight (lb/ft)	Dimensions in Stock (ft)	Order No.
- / 40	1.850	17.718	6,000	6.299	0.376	**160**	4405-040-000
2 / 50-51	2.323	17.718	5,000	8.031	0.571	**160**	4405-050-000

Accessories



CLAMP 208



CLAMP 211

Positive and negative pressure ratings are the recommended maximum operating values. Products can be manufactured to meet higher operating values upon request. The bend radius is calculated from the center of the hose in an arched position. Additional information at www.norres.com/us/technology/. NORRES reserves the right to modify technical data at any time. Technical data based on tests at 68°F and are approx. values. Proper use and maintenance of NORRES hoses is the sole responsibility of purchaser and ultimate user of the product. The individual conditions, applications and the number of variables make firm recommendations technically impossible. This information is intended as a general guide only.

2026101