

NORPLAST® 4460 QUADRIFLEX

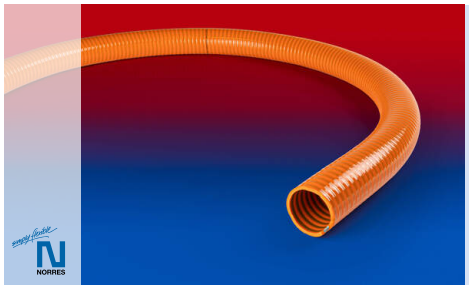



Thermoplastic suction hose

Applications
- for industrial water, wastewater and dung
- Has been used to full satisfaction in the public sector and in agriculture for years
- Due to its smooth outer wall, very suitable for use in water treatment plants, water reservoirs, slurry pits, etc.

Properties
- Has an oval spiral instead of a round one
- according to the norm EN ISO 1307:2008
- Vacuum up to 0.9 bar

Temperature range
- -15°F to 140°F

Design
- soft PVC inner layer
- PVC outer layer
- smooth construction cover
- rigid PVC spiral
- smooth inner tube

Delivery variants
- orange inner tube, orange exterior wall, anthracite spiral (standard)

I.D. (in / mm)	outer Ø (in)	Wall thickness (in)	Bending radius (in)	Weight (lb/ft)	Dimensions in Stock (ft)	Order No.
2 / 50-51	2.362	0.177	8.031	0.638	**100**	4460-050-000
3 / 75-76	3.386	0.197	11.969	1.075	**100**	4460-075-000
- / 80	3.543	0.197	12.598	1.142	**100**	4460-080-000
3,5 / 89-90	3.937	0.197	14.173	1.310	**100**	4460-090-000
4 / 100-102	4.488	0.236	16.063	1.626	**100**	4460-100-000
- / 110	4.764	0.217	17.323	1.747	**60**	4460-110-000
5 / 125-127	5.512	0.256	20.000	2.218	**50**	4460-125-000
6 / 150-152	6.575	0.295	23.937	2.957	**10 15 50**	4460-150-000

Positive and negative pressure ratings are the recommended maximum operating values. Products can be manufactured to meet higher operating values upon request. The bend radius is calculated from the center of the hose in an arched position. Additional information at www.norres.com/us/technology/. NORRES reserves the right to modify technical data at any time. Technical data based on tests at 68°F and are approx. values. Proper use and maintenance of NORRES hoses is the sole responsibility of purchaser and ultimate user of the product. The individual conditions, applications and the number of variables make firm recommendations technically impossible. This information is intended as a general guide only.

2026/21