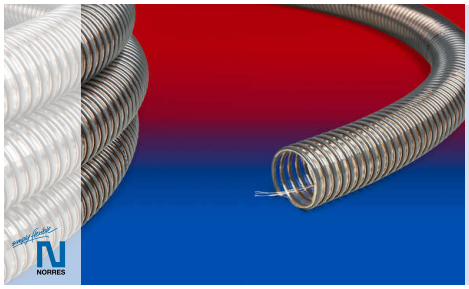
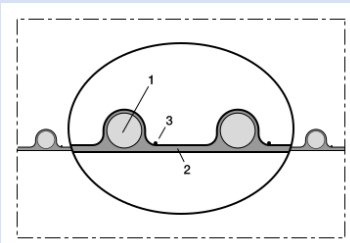
NORPLAST® PUR 385 AS GRANUFLEX





High performance polyurethane ducting hose with static-wire

Applications
- flexible hose for granulate, powder and bulk material
- wood pellet heating system: conveying of wood pellets
- textile industry: fiber extraction (on spinning/knitting and weaving machines)
- construction industry: insulation-blowing system

Properties
- abrasion resistant medium-heavy duty
- environmentally friendly due to the absence of soft PVC
- 6 times better abrasion resistance compared to the PVC version
- lower static friction due to mirror-smooth PU inner tube

Temperature Range
- -25 °C to 85 °C

Design
- NORPLAST® full plastic hose
- rigid PVC spiral
- grounding wire
- smooth interior
- wall: premium polyurethane (Pre-PUR®)

Delivery variants
- transparent inner tube with anthracite-colored hard PVC spiral

I.D. (in / mm)	outer Ø (mm)	Vacuum (bar)	Bending Radius (mm)	Weight (kg/m)	Dimensions in Stock (m)	Order No.
1,5 / 38	45.00	0,200	38.00	0.34	**30**	4609-038-000
1,57 / 40	47.00	0,200	40.00	0.35	**30**	4609-040-000
1,75 / 45	52.60	0,200	45.00	0.43	**30**	4609-045-000
2 / 51	59.00	0,200	51.00	0.52	**30**	4609-050-000
2,36 / 60	68.20	0,160	60.00	0.60	**30**	4609-060-000

Overpressure and underpressure are recommended threshold operating values, products can be subjected to higher loads upon request. The bending radius is measured through the inside of the hose arch. The right to make technical modifications is reserved. All values determined at 20 °C and are approx. data. Additional information at www.norres.com/en/technology/.


NORPLAST® PUR 385 AS GRANUFLEX


Accessories


CONNECT 246 AS


CONNECT 270-271


CONNECT PRESS ASSEMBLY 232



CONNECT 244


CONNECT 245


CONNECT MOULD ASSEMBLY 233


CONNECT THREAD FITTING 234


CONNECT 243


CONNECT 228


CLAMP 212


CONNECT 223


CLAMP 216


CLAMP 212 EC



CLAMP 217


CONNECT SAFETY CLAMP ASSEMBLY 231


CLAMP 213


CONNECT 245 VAC-TRUCK


CONNECT 240 + 241 AS


CONNECT 242

Overpressure and underpressure are recommended threshold operating values, products can be subjected to higher loads upon request. The bending radius is measured through the inside of the hose arch. The right to make technical modifications is reserved. All values determined at 20 °C and are approx. data. Additional information at www.norres.com/en/technology/.