


# NORPLAST® PUR 387 ANTIABRASIVO® AS

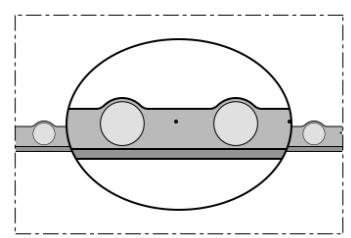

Abrasive resistant polyurethane lined hose

## Applications

- Suitable for gravel, sand, mud, cement, grain, grit and other abrasive materials
- Very suitable for use as an extremely wear resistant transport hose/pipe
- Widely used in the industrial cleaning and roofing industry for transporting gravel to flat roofs

## Properties

- Robust and very durable

- according to the norm EN ISO 1307:2008
- Vacuum up to 0.8 bar

## Temperature Range

- -15°C to 60°C

## Design

- extremely thick inner layer made of polyurethane (2mm)

- PVC outer layer
- slightly corrugated construction cover
- rigid PVC spiral
- With copper stranded wire
- smooth interior

## Delivery variants

- red inner tube, green exterior wall (standard)

I.D. (in / mm)	outer Ø (mm)	Vacuum (bar)	Operating pressure (20°C) (bar)	Bending Radius (mm)	Weight (kg/m)	Dimensions in Stock (m)	Production Lengths (m)	Order No.
3 / 75-76	92.00	0,800	6,500	456.00	2.30	50	-	4660-075-000
4 / 100-102	120.00	0,800	4,000	612.00	3.28	30	-	4660-100-000
5 / 125-127	147.00	0,800	3,500	762.00	4.50	30	-	4660-125-000
6 / 150-152	173.00	0,800	3,000	912.00	6.10	20	-	4660-150-000

## Accessories



CLAMP 211

Overpressure and underpressure are recommended threshold operating values, products can be subjected to higher loads upon request. The bending radius is measured through the inside of the hose arch. The right to make technical modifications is reserved. All values determined at 20°C and are approx. data. Additional information at [www.norres.com/en/technology/](http://www.norres.com/en/technology/).