
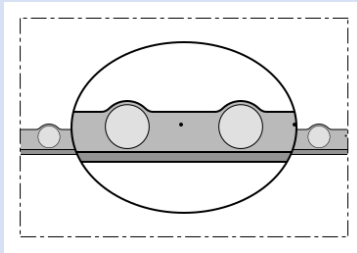


# NORPLAST® PUR 387 ANTIABRASIVO® AS

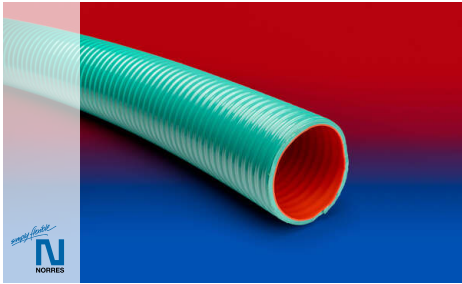

Abrasive resistant polyurethane lined hose

## Applications

- Suitable for gravel, sand, mud, cement, grain, grit and other abrasive materials
- Very suitable for use as an extremely wear resistant transport hose/pipe
- Widely used in the industrial cleaning and roofing industry for transporting gravel to flat roofs

## Properties

- Robust and very durable

- according to the norm EN ISO 1307:2008
- Vacuum up to 0.8 bar

## Temperature range

- 5°F to 140°F

## Design

- extremely thick inner layer made of polyurethane (0.08 inch)

- PVC outer layer
- slightly corrugated construction cover
- rigid PVC spiral
- With copper stranded wire
- smooth interior

## Delivery variants

- red inner tube, green exterior wall (standard)

I.D.	outer Ø	Vacuum	Operating pressure (68°F)	Bending radius	Weight	Dimensions in Stock	Production lengths	Order No.
(in / mm)	(in)	(inHG)	(bar)	(in)	(lb/ft)	(ft)	(ft)	
3 / 75-76	3.622	23.624	6,500	17.953	1.546	150	-	4660-075-000
4 / 100-102	4.724	23.624	4,000	24.094	2.204	100	-	4660-100-000
5 / 125-127	5.787	23.624	3,500	30.000	3.024	100	-	4660-125-000
6 / 150-152	6.811	23.624	3,000	35.906	4.099	50	-	4660-150-000

## Accessories



CLAMP 211