


# CONNECT 683

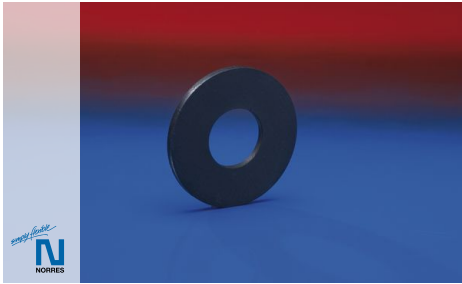

Seal for assembly of adapter bodies

## Applications

- membrane tube diffuser, for industrial and municipal wastewater treatment plant, pressure diffusion with fine bubbles, oxygen input for nitrification in activation basins, permanent and intermittent ventilation

- oxygen input and circulation in xed-bed and bioreactors, thorough mixing of activation basins, sand trap louvre ventilation, renaturation of lakes and rivers, aquacultures, sh farming

## Properties

- conforms to RoHS guideline

## Design

- wall: EPDM

| I.D. | outer Ø | Weight   | Wall Thickness | Order No.     |
|------|---------|----------|----------------|---------------|
| (mm) | (mm)    | (kg/pcs) | (mm)           |               |
| 38,5 | 65.00   | 0,006    | 3.00           | 683-0040-2760 |
| 44,0 | 65.00   | 0,005    | 3.00           | 683-0045-2760 |

Overpressure and underpressure are recommended threshold operating values, products can be subjected to higher loads upon request. The bending radius is measured through the inside of the hose arch. The right to make technical modifications is reserved. All values determined at 20°C and are approx. data. Additional information at [www.norres.com/en/technology/](http://www.norres.com/en/technology/).