


COOLING HOSE 950-955

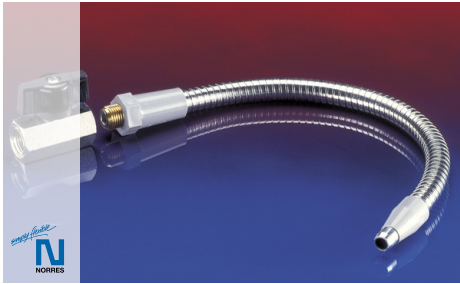

Coolant hose

Properties

- retaining any adjusted position
- good resistance to alkalis and acids
- good resistance to chemicals
- conforms to RoHS guideline
- REACH according to --> Technology / Technical Information / REACH

Temperature Range

- -20° C to 70° C

Design

- Metal hose
- rugged and non-corroding connecting thread (brass)
- wide flat

- long-life adjustable steel hose (nickel-plated)
- sealing inner tube
- robust steel drain spout

Delivery variants

- further diameters and lengths available on request
- stop cock

Thread	Length	Thread Length	Wrench Size across Flats SW	Bending Radius	Weight	Order No.
	(mm)	(mm)	(mm)	(mm)	(kg/m)	
R 1/8	200	9	19	49.00	0.08	950-0200-1210
R 1/8	250	9	17	49.00	0.10	950-0250-1210
R 1/8	320	9	17	49.00	0.12	950-0320-1210
R 1/8	400	9	17	49.00	1.50	950-0400-1210
R 1/8	500	9	17	49.00	0.19	950-0500-1210
R 1/8	630	9	17	49.00	0.24	950-0630-1210
R 1/8	800	9	17	49.00	0.30	950-0800-1210
R 1/4	200	9	19	57.00	0.12	951-0200-1210
R 1/4	250	9	19	57.00	0.15	951-0250-1210
R 1/4	320	9	19	57.00	0.18	951-0320-1210
R 1/4	400	9	19	57.00	0.23	951-0400-1210
R 1/4	500	9	19	57.00	0.28	951-0500-1210
R 1/4	630	9	19	57.00	0.35	951-0630-1210
R 1/4	800	9	19	57.00	0.45	951-0800-1210
R 3/8	200	9	22	67.00	0.18	952-0200-1210
R 3/8	250	9	22	67.00	0.22	952-0250-1210
R 3/8	320	9	22	67.00	0.28	952-0320-1210
R 3/8	400	9	22	67.00	0.35	952-0400-1210
R 3/8	500	9	22	67.00	0.43	952-0500-1210
R 3/8	630	9	22	67.00	0.54	952-0630-1210
R 3/8	800	9	24	71.00	0.68	952-0800-1210
R 1/2	320	9	24	71.00	0.33	953-0320-1210
R 1/2	400	9	24	71.00	0.40	953-0400-1210
R 1/2	500	9	24	71.00	0.50	953-0500-1210
R 1/2	630	9	24	71.00	0.62	953-0630-1210
R 1/2	800	9	24	71.00	0.78	953-0800-1210

Overpressure and underpressure are recommended threshold operating values, products can be subjected to higher loads upon request. The bending radius is measured through the inside of the hose arch. The right to make technical modifications is reserved. All values determined at 20° C and are approx. data. Additional information at www.norres.com/en/technology/.